







Maiden

Nach nahezu vier Jahren Entwicklung ist das neue Maiden das Optimum unserer derzeitigen Technologie und Innovation.

Auf schnellen Weltcup Abfahrten, in flowigen Bike Parks oder auf fetten Freeridelines in Utah - der leichte Carbonrahmen glänzt in hartem Gelände, lässt sich effizient pedalieren und zeigt überragendes Bremsverhalten. Mit dem Equalized Wheel System kann der Fahrer ohne Kompromisse zwischen 26 und 27.5 Zoll Laufrad wählen, und anschließend mit dem RIDE-4 System die Fahrwerksgeometrie präzise an die persönlichen Anforderungen anpassen.

Wir haben eng mit unseren Freeride Athleten zusammengearbeitet, sowohl beim Entwurf, als auch in der Testphase. Die persönlichen Vorlieben von Thomas Vanderham spiegeln sich in der Grundausrichtung des Bikes wieder - ein niedriger Schwerpunkt, langer Reach und aggressive Rahmengenometrie.

-  **26/27.5 ZOLL**
LAUFRADGRÖßE
-  **200 MM**
FEDERUNG VORNE
-  **200 MM**
FEDERUNG HINTEN
-  **DOWNHILL**
EINSATZGEBIET


© Thomas Vanderham
P Harockz
L FEST Series, Kamloops, BC

„Das Maiden ist das beste, vielseitigste Downhill Bike überhaupt: weitreichend anpassbar, geeignet für DH-Rennen auf höchstem Niveau, und dennoch robust genug um unzählige Bike Park Runden problemlos zu überstehen.“

 Thomas Vanderham Rocky Mountain Teamfahrer





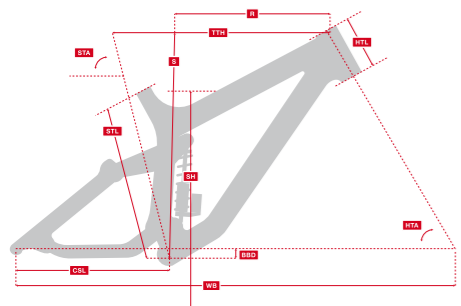




GEOMETRIE



		SM	MD	LG	XL
Oberrohr (mm)	TTH	570	588	602	620
Lenkwinkel (grad)	HTA	63 - 63.8°	63 - 63.8°	63 - 63.8°	63 - 63.8°
Steuerrohr (mm)	HTL	115	115	115	115
Sitzwinkel (grad)	STA	73.9 - 74.8°	73.9 - 74.8°	73.9 - 74.8°	73.9 - 74.8°
Sitzrohr (mm)	STL	406	432	457	457
Kettenstrebe (mm)	CSL	425	425	425	425
Tretlagerabsenkung (mm)	BBD	9.5 to -1.3	9.5 to -1.3	9.5 to -1.3	9.5 to -1.3
Reach (mm)	R	396 - 404	414 - 422	428 - 436	446 - 454
Stack (mm)	S	606 - 612	606 - 612	606 - 612	606 - 612
Schritthöhe (mm)	SH	739 - 750	739 - 750	739 - 750	739 - 750
Radstand (mm)	WB	1188 - 1185	1206 - 1203	1220 - 1217	1238 - 1235

RAHMEN TECHNOLOGIE

-  **SMOOTHWALL**
CARBON
-  **SMOOTHLINK**
FEDERUNGSSYSTEM
-  **AUTONOMOUS**
BRAKING
-  **RIDE-4**
EINSTELLUNG
-  **EQUALIZED**
WHEEL CONCEPT
-  **RTC**
DESIGN
-  **PIPELOCK**
COLLET SYSTEM



MAIDEN UNLIMITED

GLOSS CARBON/SANDBLAST

Rahmen	Smoothwall Carbon. Pipelock Bearing Pivots. Press Fit BB107. ISCG05 Tabs. RIDE-4 Adjustable Equalized 27.5 / 26 Geometry. Di2 Ready.
Dämpfer	BOS Stoy RaRe. Smoothlink Design 200mm. Lo Speed Rebound / Hi + Lo Speed Compression / Hydraulic Bump Stop / Open Bath Damper
Gabel	BOS Idylle Air 27.5, 208mm. Air Spring / Open Bath Cartridge / Lo Speed Rebound / Hi + Lo Speed Compression / Hydraulic Bump Stop / Air Bleed Ports / FCV Valve / Titanium Bolts
Steuersatz	FSA Orbit C-40: IS42mm Top / 52mm Bottom Tapered
Bremshobel	Shimano Saint
Bremsen	Shimano Saint Freeza Hydraulic Disc 203mm
Kassette	SRAM XG-795 10-24T 7spd
Kette	SRAM PC-XX1 11spd
Kurbel	Race Face SixC Cinch 165mm 34T Direct Mount Narrow-Wide 1x7spd
Tretlager	Race Face Team DH Press Fit BB107

Schalthebel	SRAM X01 DH Trigger 1x7spd
Umwerfer	e*Thirteen TRS+ ISCG05
Schaltwerk	SRAM X01 DH Type 2 All Mountain 7spd
Vorderradnabe	DT Swiss 240 / Centerlock / 32H / 20mm Axle
Hinterradnabe	DT Swiss 240 / Centerlock / 32H / XD Driver / 12 x 157mm Axle
Speichen	DT Swiss Competition
Felgen	Reynolds All Mtn Tubeless Ready Carbon
Reifen	Maxxis DHRII 3C Maxx Grip 27.5" x 2.4"
Lenker	Race Face SixC 3/4 Rise 35mm x 800mm x 9° Sweep
Vorbau	RMB Direct Mount CNC 15mm rise x 45mm
Griffe	Rocky Mountain Lock On DH
Sattel	WTB Silverado SLT Titanium
Sattelstütze	Race Face Next SL 30.9 x 400mm



MAIDEN WORLD CUP

MATTE PETROL/BURNT ORANGE/LEMONGRASS

Rahmen	Smoothwall Carbon. Pipelock Bearing Pivots. Press Fit BB107. ISCG05 Tabs. RIDE-4 Adjustable Equalized 27.5 / 26 Geometry. Di2 Ready.
Dämpfer	BOS Stoy RaRe. Smoothlink Design 200mm. Lo Speed Rebound / Hi + Lo Speed Compression / Hydraulic Bump Stop / Open Bath Damper
Gabel	BOS Idylle Air 27.5, 200mm. Air Spring / Open Bath Cartridge / Lo Speed Rebound / Hi + Lo Speed Compression
Steuersatz	FSA Orbit C-40: IS42mm Top / 52mm Bottom Tapered
Bremshobel	Shimano Saint I-Spec Shifter Mount
Bremsen	Shimano Saint Ice Tech Hydraulic Disc 203mm
Kassette	Shimano CS-5700 11-28T 10spd
Kette	Shimano HG95 10spd
Kurbel	Race Face Atlas Cinch 165mm 34T Direct Mount Narrow-Wide 1x10spd
Tretlager	Race Face Team DH Press Fit BB107
Schalthebel	Shimano Saint Rapid Fire I-Spec 1x10spd
Umwerfer	e*Thirteen TRS+ ISCG05
Schaltwerk	Shimano Saint Shadow Plus 10spd
Vorderradnabe	Stan's Neo / Oversized Chrome Bearings / 20mm Axle
Hinterradnabe	Stan's Neo / Oversized Chrome Bearings / 6 Bolt / 32H / 12 x 157mm Axle
Speichen	DT Swiss Competition
Felgen	Stan's ZTR Rapid 30 Tubeless Ready
Reifen	Maxxis DHRII 3C Maxx Grip 27.5" x 2.4"
Lenker	Race Face Atlas 3/4 Rise 35mm x 800mm x 9° Sweep
Vorbau	RMB Direct Mount CNC 15mm rise x 45mm
Griffe	Rocky Mountain Lock On DH
Sattel	WTB Silverado SL
Sattelstütze	Race Face Turbine 30.9 x 400mm



MAIDEN PRO

GLOSS CARBON/SANDBLAST

Rahmen	Smoothwall Carbon. Pipelock Bearing Pivots. Press Fit BB107. ISCG05 Tabs. RIDE-4 Adjustable Equalized 27.5 / 26 Geometry. Di2 Ready.
Dämpfer	BOS Stoy. Smoothlink Design 200mm. Rebound / Hi + Lo Speed Compression / Open Bath Damper / BOS Biodegradable Oil
Gabel	BOS Idylle 27.5, 200mm. Lo Speed Rebound / Hi + Lo Speed Compression / Open Bath Damper / BOS Biodegradable Oil
Steuersatz	FSA Orbit C-40: IS42mm Top / 52mm Bottom Tapered
Bremshobel	Shimano XT I-Spec Shifter Mount
Bremsen	Shimano XT Ice Tech Hydraulic Disc 203mm
Kassette	Shimano CS-4600 12-28T 10spd
Kette	Shimano HG-54 10spd
Kurbel	Race Face Respond 165mm 34T Narrow-Wide 1x10spd
Tretlager	Race Face Team DH Press Fit BB107
Schalthebel	Shimano Zee Rapid Fire 1x10spd
Umwerfer	e*Thirteen TRS ISCG05
Schaltwerk	Shimano Zee Shadow Plus 10spd
Vorderradnabe	Wheeltech DH / 6 Bolt / 32H / 20mm Axle
Hinterradnabe	Wheeltech DH / 6 Bolt / 32H / 12 x 157mm Axle
Speichen	WTB 2.0 Stainless
Felgen	Wheeltech Helix TR29 Tubeless Compatible by SUNringle
Reifen	Maxxis DHRII Super Tacky 27.5" x 2.4"
Lenker	Race Face Respond 1/2 Rise 31.8mm x 785mm x 9° Sweep
Vorbau	RMB Direct Mount 15mm rise x 45mm
Griffe	Rocky Mountain Lock On DH
Sattel	WTB Volt Race
Sattelstütze	Race Face 30.9mm x 375mm



MAIDEN PARK

MATTE PETROL/BURNT ORANGE/LEMONGRASS

Rahmen	Smoothwall Carbon. Pipelock Bearing Pivots. Press Fit BB107. ISCG05 Tabs. RIDE-4 Adjustable Equalized 27.5 / 26 Geometry. Di2 Ready.
Dämpfer	X Fusion Vector Coil RC. Smoothlink Design 200mm. Compression / Rebound
Gabel	X Fusion RV1 HLR 27.5 200mm. Hi Speed + Lo Speed Compression / Rebound
Steuersatz	FSA Orbit C-40: IS42mm Top / 52mm Bottom Tapered
Bremshobel	Shimano Deore I-Spec Shifter Mount
Bremsen	Shimano Deore Hydraulic Disc 203mm
Kassette	Shimano CS-4600 12-28T
Kette	Shimano HG-54 10spd
Kurbel	Race Face Chester 165mm 34T Narrow-Wide 1x10spd
Tretlager	Race Face Team DH Press Fit BB107
Schalthebel	Shimano Deore Rapid Fire I-Spec 1x10spd
Umwerfer	e*Thirteen TRS ISCG05
Schaltwerk	Shimano Zee Shadow Plus Direct Mount 10spd
Vorderradnabe	Wheeltech AM / 6 Bolt / 20mm Axle
Hinterradnabe	Wheeltech DH / 6 Bolt / 12 x 157mm Axle
Speichen	WTB 2.0 Stainless
Felgen	Wheeltech Helix TR29 Tubeless Compatible by SUNringle
Reifen	Maxxis DHRII Super Tacky 27.5" x 2.4"
Lenker	Race Face Respond 1/2 Rise 31.8mm x 785mm x 8°
Vorbau	RMB Direct Mount 31.8 15mm rise x 45mm
Griffe	Rocky Mountain Lock On DH
Sattel	WTB Volt
Sattelstütze	Rocky Mountain SL 30.9mm x 350mm

